

# BSH Series

## Internal side mount level sensor series

**Compact internal fit device** available in Nylon & Polypropylene. The use of low power switch makes it economical range of level sensing devices. These devices can be installed for level sensing in open tanks. Application varies from level sensing of water to costly industrial fluids. Application specific switching action can be achieved by maintaining the desired float position in the fluid. Mounting requires 16.5 mm hole in tank. The Reed switch operates within 40 deg movement of the float.


### Specifications

	BSH-01	BSH-02
Material	Nylon	Polypropylene
Temp range (deg C)	-20 to +75	-20 to +100
Min fluid S.G .	0.85	0.85
Contact Form	N/O (N/C)	N/O (N/C)
Switching Power (VA)	10	10
Switching Voltage (V)	200 dc	200 dc
Switching current (A)	0.5	0.5
Lead Outs	22 AWG PVC 50 cm Std	22 AWG PVC 50 cm Std

\* All ratings for resistive load

### Features

- 1) Economical Range
- 2) 10 W Switching
- 3) Reliable & consistent signal
- 4) Internal Mount

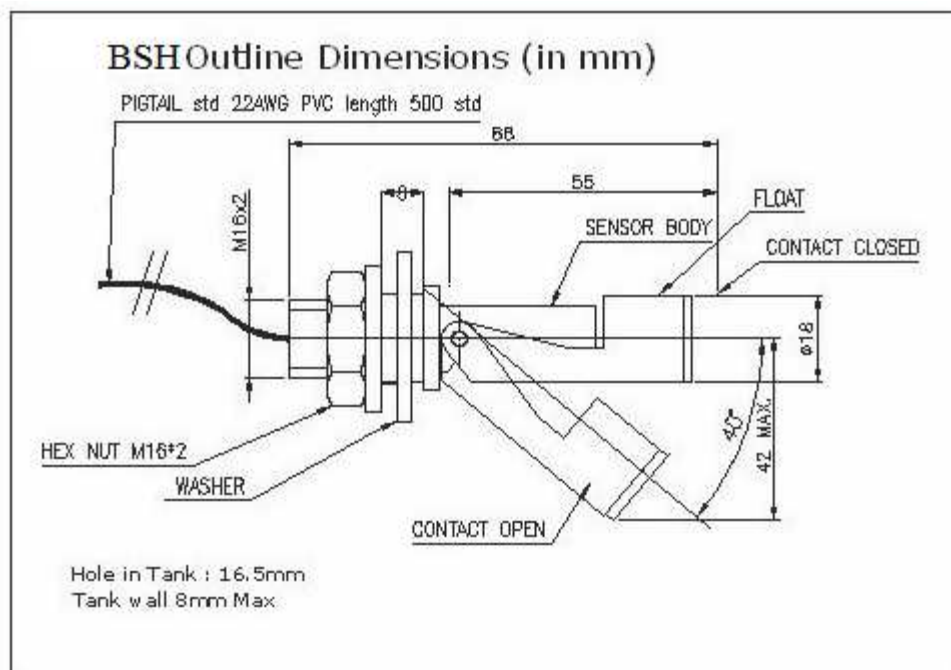

### Standard Parts

### Description

BSH01HPN

10 W 200 Vdc Horizontal Internal Mount Level Switch in Nylon with 50 cms PVC lead & Nitrile Gasket.

BSH02HPN

10 W 200 Vdc Horizontal Internal Mount Level Switch in Polypropylene with 50 cms PVC lead & Nitrile Gasket.

Note: For customised solutions contact CAT